



Attaching the Ultimate Dust Deputy to the Festool 2018 Models

The latest versions of the Festool dust extractors have new fixturing for accessory attachment. Please follow these instructions to attach your Ultimate Dust Deputy to the newest version of the Festool.

1. Unlatch the 4 green latches on top of the Festool.

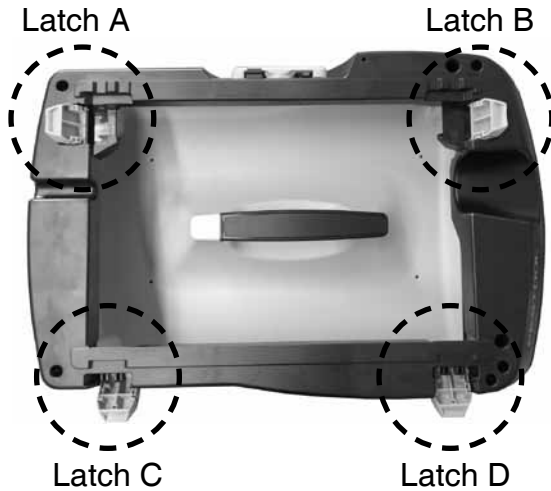


Fig. 1 - Festool, all latches open

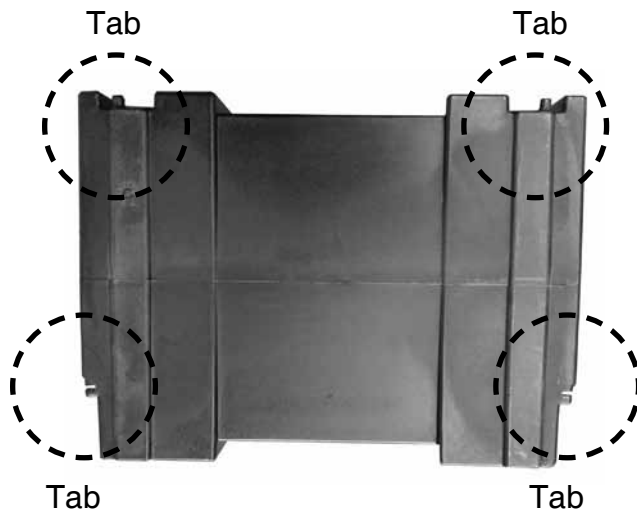


Fig. 2 - Ultimate Dust Deputy tabs

2. Place the Ultimate Dust Deputy on top of the Festool vacuum and line up tabs on box with Festool latches A & B. The latches and tabs will only align one way.

3. Close latches A&B first over the Ultimate Dust Deputy box tabs. Figs. 3 & 4 & 5 below.



Fig. 3 - Festool latches A & B open



Fig. 4 - Dust Deputy tabs lined up with Festool latches A & B



Fig. 5 - Festool latch locked in place.

The latches fit into notches on the Ultimate Dust Deputy box.

4. Secure the two latches that open on the other side of the Festool over the Ultimate Dust Deputy tabs. Figs. 6 & 7 below.



Fig. 6 - Festool latches C & D opened.



Fig. 7 - Festool latches C & D closed.

5. Run the 1/4" tubing across the Ultimate Dust Deputy to the SD elbow with fitting (AXD600104) on the Festool. Figs. 8 & 9 below.



Fig. 8 - 1/4" tubing connected



Fig. 9 - Elbow with fitting (AXD600104)

6. Attach the SD elbow without the fitting (AXD600103) to the outlet of the Dust Deputy. Figs. 10 & 11 below.



Fig. 10 - SD Elbow without fitting attached to cyclone outlet.



Fig. 11 - Elbow without fitting (AXD600103)

7. Run the 2" hose between the SD elbow without the fitting on the top of the Dust Deputy cyclone and the elbow with the fitting on the Festool as shown in Fig. 12 below.



Fig. 12 - 2" hose between the Ultimate Dust Deputy and the Festool.